

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number  
**WO 2005/003512 A1**

- (51) International Patent Classification<sup>7</sup>: E21B 43/12, F04D 29/04, F16C 39/06
- (21) International Application Number: PCT/NO2004/000201
- (22) International Filing Date: 1 July 2004 (01.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
20033034 2 July 2003 (02.07.2003) NO
- (71) Applicant (for all designated States except US):  
**KVAERNER OILFIELD PRODUCTS AS** [NO/NO];  
Joseph Kellers vei 20, N-3408 Tranby (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **STINESSEN, Kjell, Olav** [NO/NO]; Nedre Skog vei 8B, N-0281 Oslo (NO).  
**SKOFTELAND, Hakon** [NO/NO]; Krabberudbakken 17, N-1337 Sandvika (NO).
- (54) Title: SUBSEA COMPRESSOR MODULE AND A METHOD FOR CONTROLLING THE PRESSURE IN SUCH A SUBSEA COMPRESSOR MODULE
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

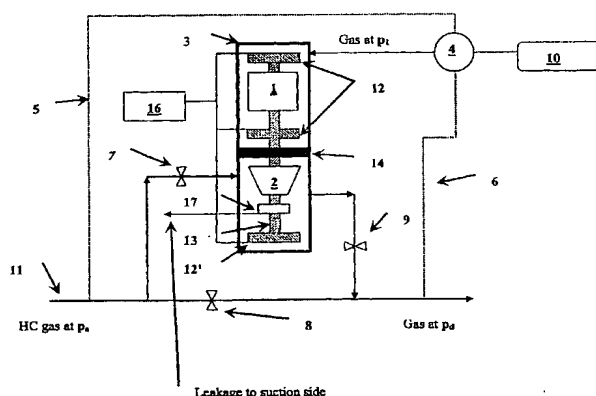

(57) Abstract: A subsea gas compressor module having a housing comprising a sealing element (14) generally defining within said pressure housing at first compartment holding as compressor (2) and a second compartment holding an electric motor (1), said compressor and motor being driveably connected by at least one shaft (13). The first compartment is connected to an inlet line (11) and an outlet line for sealing hydro carbon gas and for discharging gas. The second compartment comprises magnetic bearings (12) for supporting said at least one shaft, and a pressure and volume regulator io is fluidly connected to said second department and a gas supply (5; 11) of gas, and comprises means for sense in respective pressures in the inlet and outlet lines were by, based on a magnitude of said sense pressure, the pressure and volume regulator controls the pressure at which gas is injected into said second compartment. The subsea gas compressor module is for ever characterised in that at least one shaft is supported by is magnetic bearings controlled by control unit (16), where the bearings and control unit are placed in at least one pressure housing comprising a fluid having a controlled pressure, whereby said bearing and control unit are protected from the ingress of the sea water.



**Published:**

— *with international search report*

**(15) Information about Correction:**

see PCT Gazette No. 11/2005 of 17 March 2005, Section II

**(48) Date of publication of this corrected version:**

17 March 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*